
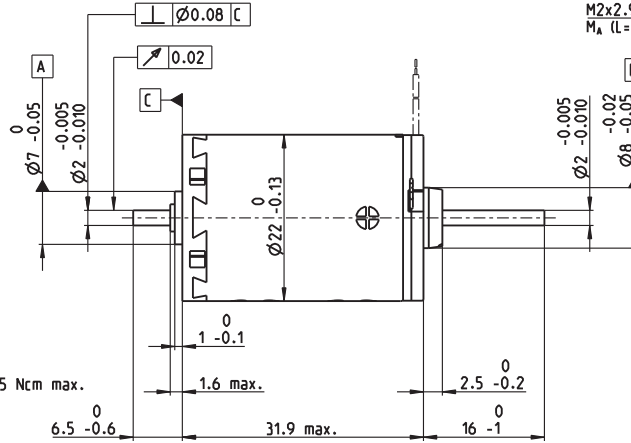



# A-max 22 Ø22 mm, Graphite Brushes, 6 Watt

Kabel AWG 24/7  
cable UL Style 1061

⊕ Kabel rot  
cable red

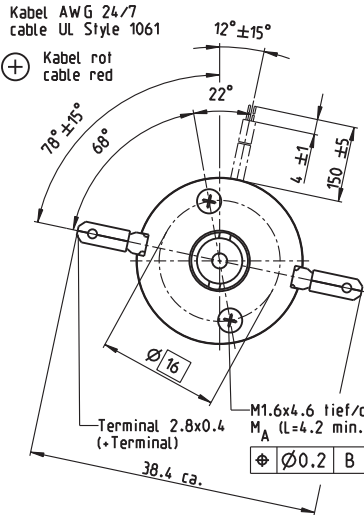

M2x2.9 tief/deep  
MA (L=2.5 min.) 5.5 Ncm max.

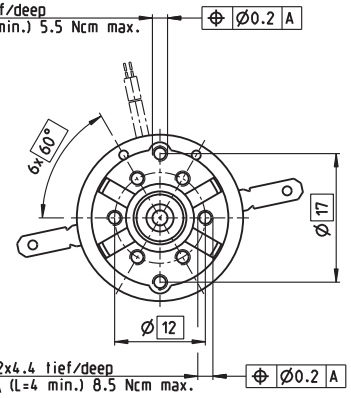

M 1:1

- Stock program
- Standard program
- Special program (on request)

Part Numbers												
with terminals	110156	110158	110159	110160	110161	110162	110163	110164	110165	110166	110167	110168
with cables	139848	353023	353024	231171	353025	353026	231174	353027	353028	353029	316659	353603

Motor Data													
Values at nominal voltage													
1 Nominal voltage	V	6	9	9	12	12	15	18	24	24	36	48	48
2 No load speed	rpm	9240	9690	8500	10200	9170	10000	9770	10500	8480	9630	9110	8210
3 No load current	mA	83.1	57.9	49.6	45.8	40.5	36	29	23.7	18.4	14.2	9.99	8.84
4 Nominal speed	rpm	6240	6530	5350	7060	6000	6890	6600	7380	5270	6420	5840	4940
5 Nominal torque (max. continuous torque)	mNm	5.91	6.88	7.04	6.96	6.95	6.93	6.92	6.9	6.97	6.86	6.75	6.86
6 Nominal current (max. continuous current)	A	1.08	0.859	0.77	0.681	0.613	0.534	0.432	0.347	0.283	0.21	0.147	0.135
7 Stall torque	mNm	19.4	22.1	19.8	23.7	20.9	22.9	22	23.7	18.9	21.1	19.2	17.6
8 Stall current	A	3.29	2.59	2.04	2.17	1.72	1.65	1.29	1.12	0.721	0.606	0.393	0.325
9 Max. efficiency	%	67	70	69	72	70	72	72	73	70	72	71	70
Characteristics													
10 Terminal resistance	Ω	1.82	3.48	4.42	5.53	6.96	9.09	14	21.5	33.3	59.4	122	148
11 Terminal inductance	mH	0.106	0.223	0.288	0.363	0.445	0.585	0.891	1.37	2.1	3.69	7.3	8.97
12 Torque constant	mNm/A	5.9	8.55	9.73	10.9	12.1	13.9	17.1	21.2	26.2	34.8	48.9	54.3
13 Speed constant	rpm/V	1620	1120	981	875	790	689	558	450	364	274	195	176
14 Speed / torque gradient	rpm/mNm	500	454	446	444	455	452	457	456	461	468	487	479
15 Mechanical time constant	ms	21.3	20.5	20.4	20.2	20.3	20.2	20.1	20.1	20.1	20.1	20.2	20.1
16 Rotor inertia	gcm <sup>2</sup>	4.07	4.32	4.37	4.36	4.26	4.27	4.2	4.2	4.16	4.09	3.97	4.01

## Specifications

Thermal data	
17 Thermal resistance housing-ambient	20 K/W
18 Thermal resistance winding-housing	6.0 K/W
19 Thermal time constant winding	10.2 s
20 Thermal time constant motor	313 s
21 Ambient temperature	-30...+85°C
22 Max. winding temperature	+125°C

Mechanical data (sleeve bearings)	
23 Max. speed	9800 rpm
24 Axial play	0.05 - 0.15 mm
25 Radial play	0.012 mm
26 Max. axial load (dynamic)	1 N
27 Max. force for press fits (static) (static, shaft supported)	80 N / 440 N
28 Max. radial load, 5 mm from flange	2.8 N

Mechanical data (ball bearings)	
23 Max. speed	9800 rpm
24 Axial play	0.05 - 0.15 mm
25 Radial play	0.025 mm
26 Max. axial load (dynamic)	3.3 N
27 Max. force for press fits (static) (static, shaft supported)	45 N / 240 N
28 Max. radial load, 5 mm from flange	12.3 N


Other specifications	
29 Number of pole pairs	1
30 Number of commutator segments	9
31 Weight of motor	54 g

Values listed in the table are nominal.  
Explanation of the figures on page 151.

### Option

Ball bearings in place of sleeve bearings

## Operating Range

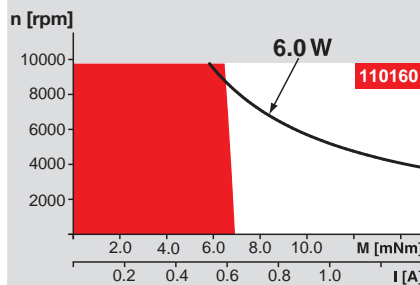

## Comments


**Continuous operation**  
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient.  
= Thermal limit.

**Short term operation**  
The motor may be briefly overloaded (recurring).

— Assigned power rating

## maxon Modular System

- Planetary Gearhead**  
Ø22 mm  
0.1 - 0.6 Nm  
Page 327/328
- Planetary Gearhead**  
Ø22 mm  
0.5 - 2.0 Nm  
Page 329/331
- Spur Gearhead**  
Ø24 mm  
0.1 Nm  
Page 335
- Spindle Drive**  
Ø22 mm  
Page 368/369

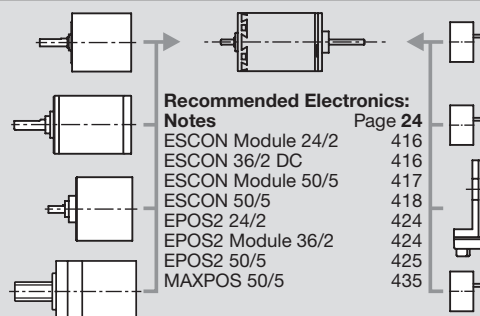

## Overview on page 20-27

- Encoder MR**  
32 CPT,  
2 / 3 channels  
Page 388
- Encoder MR**  
128 / 256 / 512 CPT,  
2 / 3 channels  
Page 390
- Encoder Enc**  
22 mm  
100 CPT, 2 channels  
Page 398
- Encoder MEnc**  
Ø13 mm  
16 CPT, 2 channels  
Page 410

### Recommended Electronics:

- Notes**
- ESCON Module 24/2 416
- ESCON 36/2 DC 416
- ESCON Module 50/5 417
- ESCON 50/5 418
- EPOS2 24/2 424
- EPOS2 Module 36/2 424
- EPOS2 50/5 425
- MAXPOS 50/5 435