


EC 60 Ø60 mm, brushless, 400 Watt

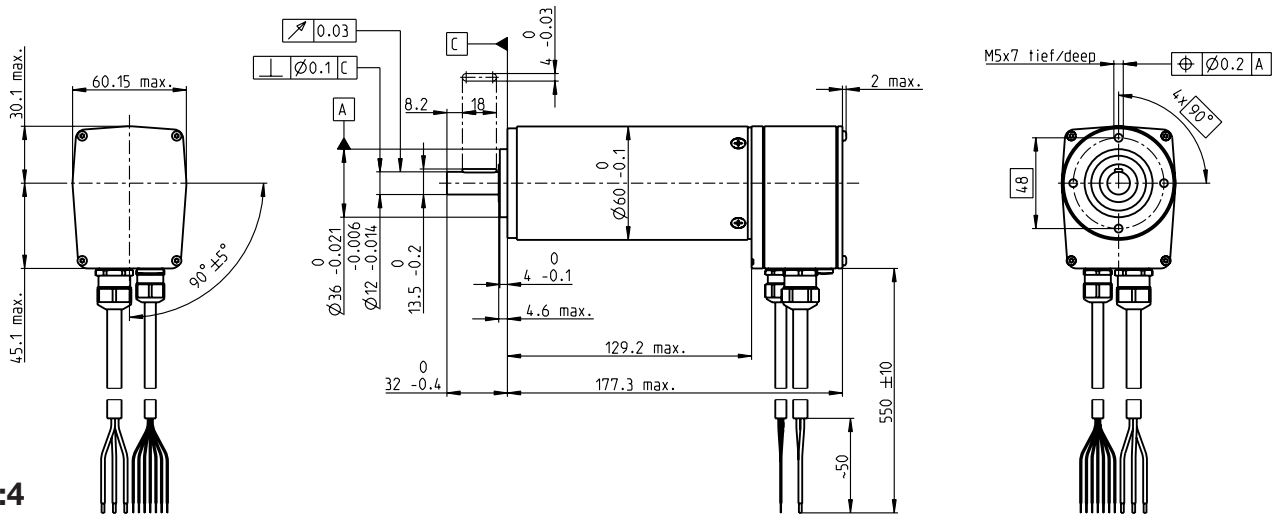


M 1:4

- Stock program
- Standard program
- Special program (on request)

Part Numbers	
167132	167131

Motor Data			
Values at nominal voltage			
1 Nominal voltage	V	48	48
2 No load speed	rpm	5370	3100
3 No load current	mA	670	268
4 Nominal speed	rpm	4960	2680
5 Nominal torque (max. continuous torque)	mNm	768	843
6 Nominal current (max. continuous current)	A	9.56	5.9
7 Stall torque	mNm	11800	6820
8 Stall current	A	139	46.4
9 Max. efficiency	%	87	86
Characteristics			
10 Terminal resistance phase to phase	Ω	0.345	1.03
11 Terminal inductance phase to phase	mH	0.273	0.82
12 Torque constant	mNm/A	84.9	147
13 Speed constant	rpm/V	113	65
14 Speed/torque gradient	rpm/mNm	0.457	0.457
15 Mechanical time constant	ms	3.98	3.98
16 Rotor inertia	gcm ²	831	831

Specifications	
Thermal data	
17 Thermal resistance housing-ambient	1.3 K/W
18 Thermal resistance winding-housing	0.5 K/W
19 Thermal time constant winding	33.9 s
20 Thermal time constant motor	1200 s
21 Ambient temperature	-20...+100°C
22 Max. winding temperature	+125°C
Mechanical data (preloaded ball bearings)	
23 Max. speed	7000 rpm
24 Axial play at axial load < 30 N	0 mm
	> 30 N max. 0.14 mm
25 Radial play	preloaded
26 Max. axial load (dynamic)	24 N
27 Max. force for press fits (static) (static, shaft supported)	392 N
28 Max. radial load, 5 mm from flange	6000 N
	240 N

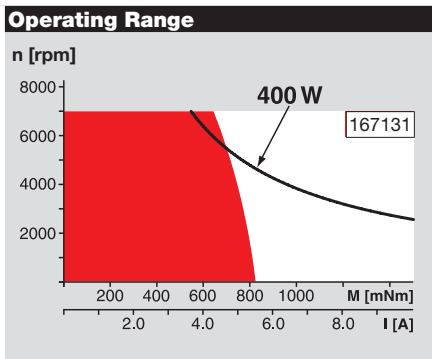

Comments

- Continuous operation**
In observation of above listed thermal resistance (lines 17 and 18) the maximum permissible winding temperature will be reached during continuous operation at 25°C ambient. = Thermal limit.
- Short term operation**
The motor may be briefly overloaded (recurring).
- Assigned power rating**

Other specifications	
29 Number of pole pairs	1
30 Number of phases	3
31 Weight of motor	2450 g
Protection to	IP54*
Values listed in the table are nominal.	
Connection motor (Cable AWG 16)	
Cable 1	Motor winding 1
Cable 2	Motor winding 2
Cable 3	Motor winding 3
Connection sensors (Cable AWG 24)¹⁾	
white	Hall sensor 3
brown	Hall sensor 2
green	Hall sensor 1
yellow	GND
grey	V _{Hall} 4.5 ... 24 VDC
blue	Temperature sensor (PTC)
pink	Temperature sensor (PTC)
¹⁾ Not lead through in combination with resolver.	
Temperature monitoring, PTC resistance Micropille	
110°C, R 25°C < 0.5 kΩ, R 105°C = 1.2...1.5 kΩ,	
R 115°C = 7...13 kΩ, R 120°C = 18...35 kΩ	
Wiring diagram for Hall sensors see p. 35	

maxon Modular System	Overview on page 20-27																								
Planetary Gearhead Ø81 mm 20 - 120 Nm Page 357	Encoder HEDL 9140 500 CPT, 3 channels Page 405 Resolver Res Ø26 mm 10 V Page 412 Brake AB 41 24 VDC 2.0 Nm Page 449																								
Recommended Electronics:																									
<table style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%; padding: 2px;">Notes</td> <td style="width: 50%; padding: 2px;">Page 26</td> </tr> <tr> <td style="padding: 2px;">ESCON Mod. 50/5</td> <td style="padding: 2px;">417</td> </tr> <tr> <td style="padding: 2px;">ESCON Mod. 50/4 EC-S</td> <td style="padding: 2px;">417</td> </tr> <tr> <td style="padding: 2px;">ESCON 50/5</td> <td style="padding: 2px;">418</td> </tr> <tr> <td style="padding: 2px;">ESCON 70/10</td> <td style="padding: 2px;">418</td> </tr> <tr> <td style="padding: 2px;">DEC Module 50/5</td> <td style="padding: 2px;">420</td> </tr> <tr> <td style="padding: 2px;">EPOS2 50/5, 70/10</td> <td style="padding: 2px;">425</td> </tr> <tr> <td style="padding: 2px;">EPOS4 Module 50/8</td> <td style="padding: 2px;">431</td> </tr> <tr> <td style="padding: 2px;">EPOS4 Comp. 50/8 CAN</td> <td style="padding: 2px;">431</td> </tr> <tr> <td style="padding: 2px;">EPOS4 Module 50/15</td> <td style="padding: 2px;">432</td> </tr> <tr> <td style="padding: 2px;">EPOS4 Comp. 50/15 CAN</td> <td style="padding: 2px;">432</td> </tr> <tr> <td style="padding: 2px;">MAXPOS 50/5</td> <td style="padding: 2px;">435</td> </tr> </table>		Notes	Page 26	ESCON Mod. 50/5	417	ESCON Mod. 50/4 EC-S	417	ESCON 50/5	418	ESCON 70/10	418	DEC Module 50/5	420	EPOS2 50/5, 70/10	425	EPOS4 Module 50/8	431	EPOS4 Comp. 50/8 CAN	431	EPOS4 Module 50/15	432	EPOS4 Comp. 50/15 CAN	432	MAXPOS 50/5	435
Notes	Page 26																								
ESCON Mod. 50/5	417																								
ESCON Mod. 50/4 EC-S	417																								
ESCON 50/5	418																								
ESCON 70/10	418																								
DEC Module 50/5	420																								
EPOS2 50/5, 70/10	425																								
EPOS4 Module 50/8	431																								
EPOS4 Comp. 50/8 CAN	431																								
EPOS4 Module 50/15	432																								
EPOS4 Comp. 50/15 CAN	432																								
MAXPOS 50/5	435																								

*Protection level only when installed with flange-side seal.